

AssoMat III

Mattress Installation Frame



SPECIFICATIONS

Dimensions	L6.3m W2.1m H1.8m
Weight	1520Kg
Max product weight	15000Kg
Max operation depth	3000m

Up to 4 thrusters

1 Hydraulic Power Unit

1 Tower with propeller

1 Umbilical

Venom 3k-200 ROV

Up to 8 low light cameras

Up to 4 pan/tilt


Up to 12 LED lights fully dimmable


Up to 4 sonars (both imaging & profiling)

1 x altimeter

1 x gyro compass

Up to 2 SSBL transponders

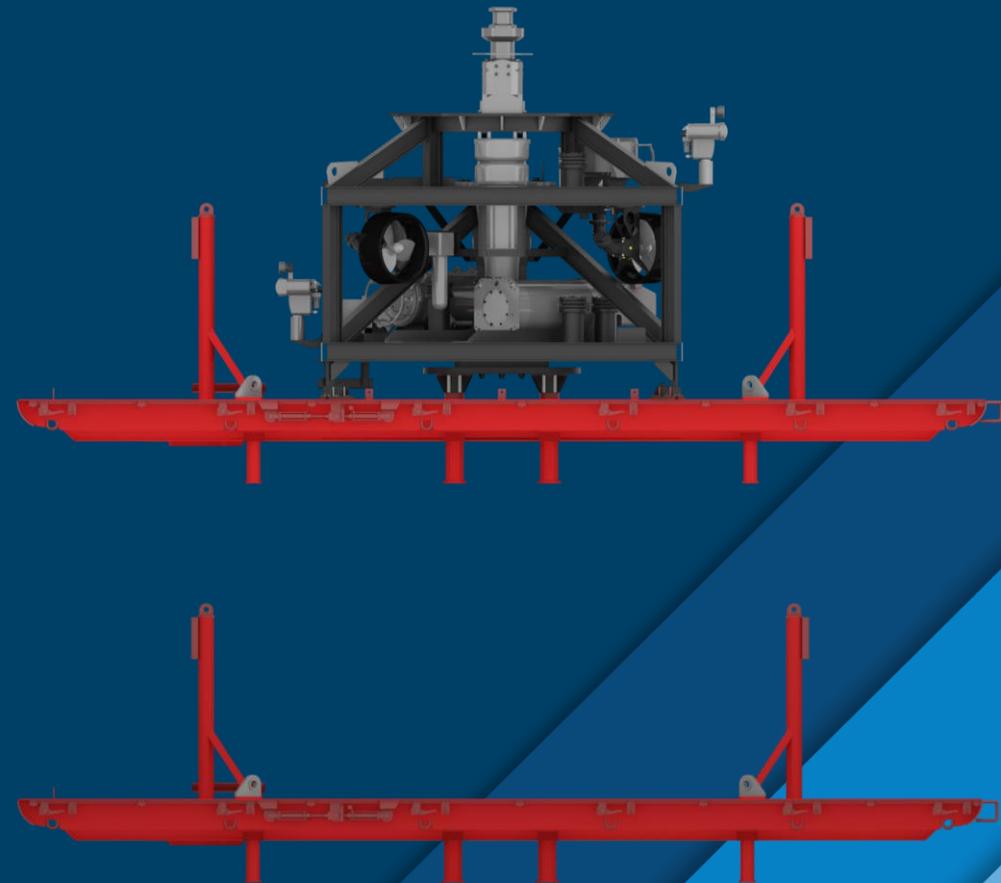

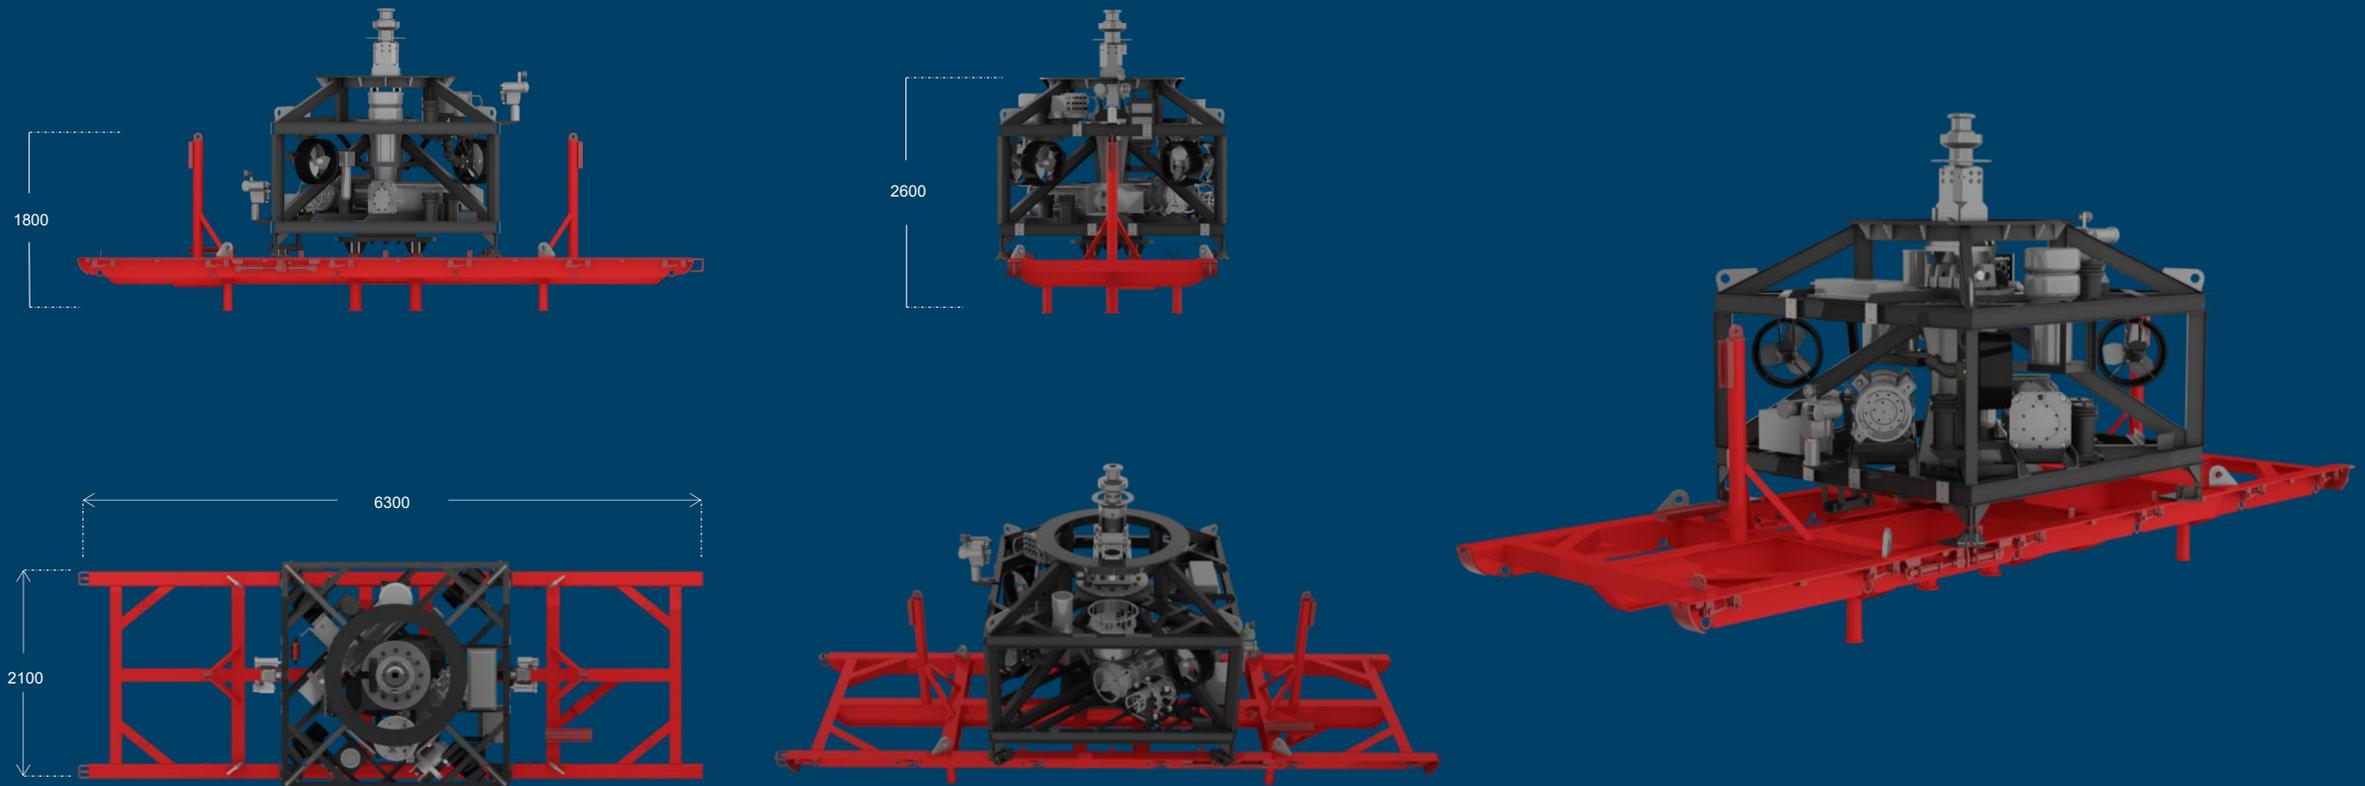

Membership - Accreditations



Disclaimer

The specification details are illustrative for marketing purposes only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement. Specifications are subject to change without any prior notification.

Contact Information

 1 Alieftikis Str., Elefsis 19200, Greece

 **Contact:** T (Direct) : (+30) 211.888.5100 T (Main) : (+30) 211.888.5180 E. central@assogroup.com  www.assogroup.com



Membership - Accreditations



Disclaimer

The specification details are illustrative for marketing purposes only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement. Specifications are subject to change without any prior notification.

Contact Information

 1 Alieftikis Str., Elefsis 19200, Greece

 **Contact:** T (Direct) : (+30) 211.888.5100 T (Main) : (+30) 211.888.5180 E. central@assogroup.com  www.assogroup.com